

# APM 460<sup>sensor</sup>

## MATTRESS SPECIFICATIONS



**PRESSURE ULCER GRADE:** ● I ● II ● III ● IV

**MAX. PATIENT WEIGHT:** 230 kg

\* incl. transportation safety lock

**ITEM NO:** 991900N

### CONTROL UNIT:

Measurements: 39 x 21 x 12 cm

Weight: 5.0 kg

2 membrane compressors, digital control with pressure sensor, alternating pressure, static mode, care mode, 3 time cycles (5/10/15 min.), automatic key lock function (3 min.), low pressure alarm, power failure alarm, set-up memory function

### MATTRESS:

Measurements: 200 x 88 x 22 cm (inflated incl. 2 cm mattress base)

Weight: 12.5 kg

20 cells, 3 head cells static, 7 extra narrow heel cells, non-bending connecting tubes\*, self-closing connection valves, CPR emergency ventilation

### MATERIALS:

Cells: nylon with polyurethane coating

Cover: bi-elastic PU/PES, breathable, slip-retardant

Base: nylon cover with integrated pocket for 2 cm base mattress


### INCLUDED IN DELIVERY:

transport bag for mattress and control unit, foam mattress base with nylon cover

**THE APM 460 SENSOR ALTERNATING PRESSURE SYSTEM IS SUITED FOR THE TREATMENT OF PRESSURE ULCERS UP TO GRADE IV (ACCORDING TO EPUAP).**

The APM 460 sensor features an auto detect patient movement sensor below the cells in the trunk area. It responds to the patient's weight and adjusts the pressure automatically. An additional inclination sensor increases the pressure when raising the

- bi-elastic, breathable PU/PES cover
- non-bending connecting tubes
- transportation safety lock
- external CPR valve
- automatic key lock
- alternating, static and care pressure modes
- Sensor-Pad for automatic pressure adjustment
- 230 kg max. patient weight

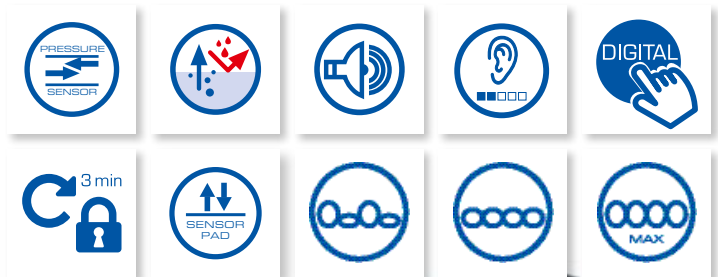

Optional: Integrable pillow 80 x 30 x 5,5 cm, 0,32 kg  
Item no.: 992000

